2022 2023 feel the nature in every step Gym and Sport Flooring

Content

- Our Journey Begins
- Rubber is Difference
- Why Floorament?
- Our Floor Our Soul
- Quality comes first
- Rubber friendly

Explore our range:

- 1. Cardio & Strength
- 2. Functional Zones
- 3. Free Weight Areas
- 4. Group Exercise & Spinning Studios
- 5. Crossfit & Budget Gyms
- 6. Sprint Tracks and Sport court
- 7. Graphics & Flooring customisation








What is your strongest strength?
 We are gentle but not weak.
 We would like to protect everyone around us to provide them better quality of living, to live safely and comfortably.

 Floorament has developed our strength together with flexibility to every step of every lifestyle.

Rubber is Difference

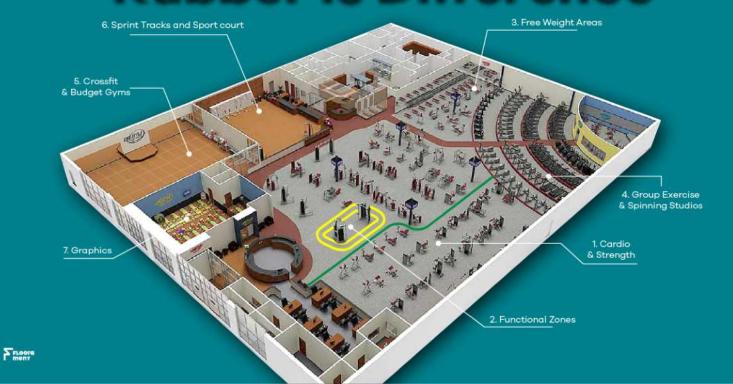

We are natural, we are safe,
we protect and we are environmental
friendly. Rubber flooring is a crucial
part of any successful gym fit out and
is often not given the necessary consideration.

Explore our range:


- 1. Cardio & Strength
- 2. Functional Zones
- 3. Free Weight Areas
- 4. Group Exercise & Spinning Studios
- 5. Crossfit & Budget Gyms
- 6. Sprint Tracks and Sport court
- 7. Graphics




Exploring ideas of authenticity and appropriation, Craft and Technology experiences merge to create new interpretations of signature fitness flooring.

- Manufacturer and supplier of Craft with high performance fitness flooring and rubber surfacing products.
- 25 years of experience.
- Pride ourselves on craft quality, local material, design, service, customer relations and honesty.
- Premium local natural rubber, we are very proud to be a part of the process to help create the better quality of life for Thai Rubber Farmer.



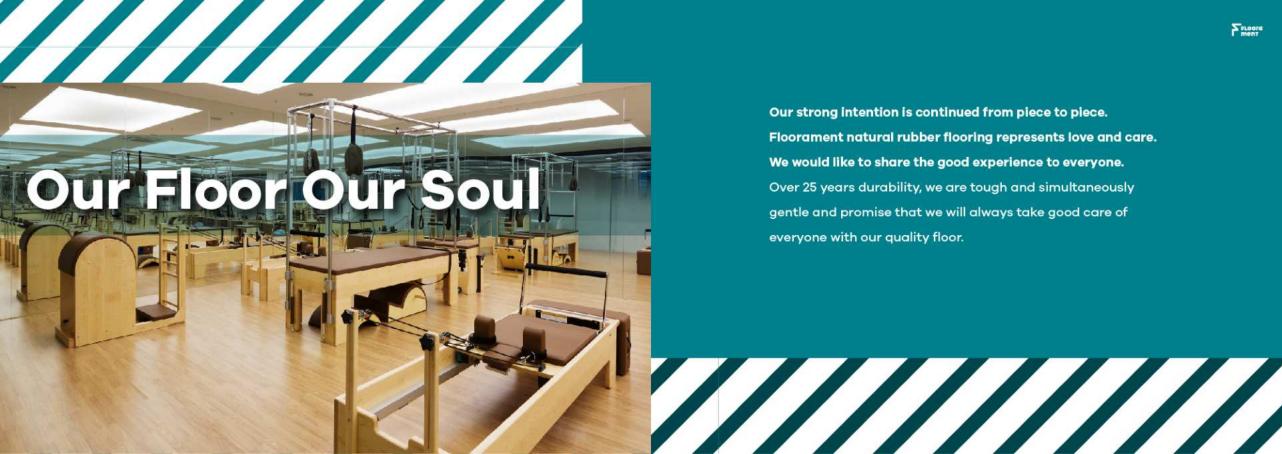

Our strong intention is continued from piece to piece. Floorament natural rubber flooring represents love and care. We would like to share the good experience to everyone. Over 25 years durability, we are tough and simultaneously gentle and promise that we will always take good care of everyone with our quality floor.

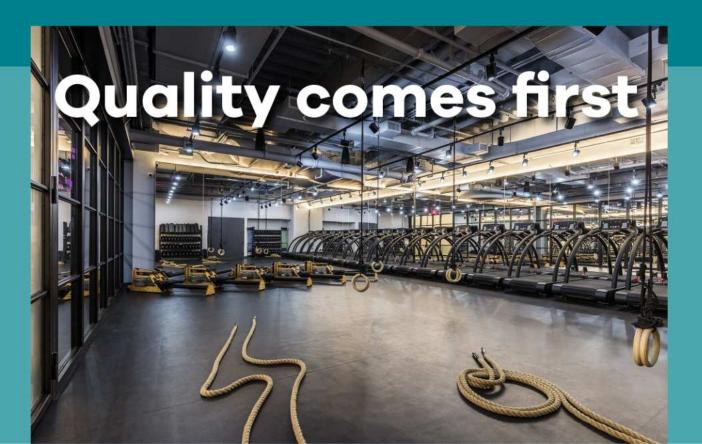



TIS (มอก.) for rubber flooring products.



ASTM International Certification.



UL: Standard Safety Testing.



DIN: Fire classification of construction products and building elements.



BSI: British Standards Institution, the national standards body of the United Kingdom.





Floorament Tile produces from quality rubber.

All that we concentrate and try our best to find the quality Rubber to produce our floors is because we determine to create Floorament as high quality product, high specification, and to be the quality product that will truly take care everyone.

- Floorament commitment is the responsibility to protect our environment. Floorament natural rubber tile is free from toxic or any hazardous.
- Rubber flooring has easily and cleaner recycled process. Rubber could be sliced or ground and it can be reused as recycled for almost 80% without any toxic which will be harmful to environment.





Cardio & Strength



Floorament Natural Rubber Flooring.

Durable, abrasive resistance, not easily teared.

Natural Rubber Floorament pass the test result from standard institute. It is durable, suitable for Cardio & Strength area which does not make any effect on the surface. Moreover, any equipment could not make any damage on the tiles.

Floorament Natural Rubber Flooring is available in rolls and square tiles.



Available in: Hammered Tone, Hammer Tone Granite, Studded

FLOOR

Thickness: 2.0mm. | 3.0 mm | 3.5mm

Size: Tiles 60cm x 60cm | Roll 122cm x 15m

Series: HM, HG, ST, NT

Construction: Single layer

Material: Virgin natural rubber

Safety Pass : EN71-3


Standard: TIS2377

Appearance: Smooth, dense closed face

Footfall Usage : High

Installation: Bonded

Adhesive: Dunlop GP Low Smell Adhesive | HP7

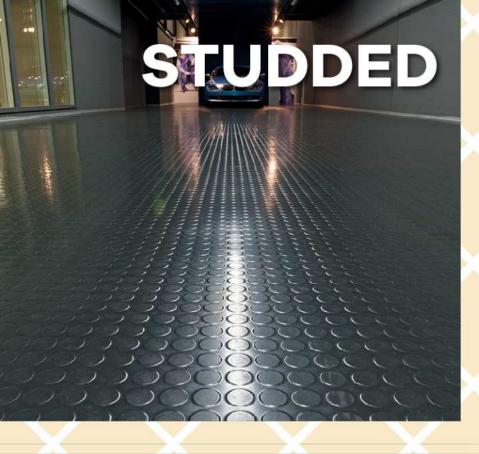

ST | NATURAL RUBBER FLOOR TILES

Unicolor Rubber Floor Tiles for round studded surface and has been formulated as a highly durable product. It performs well in all high traffic areas.

APPLICATIONS

Education, Shopping Center, Residence, Office, Healthcare, Fitness, Warehouse

FEATURES

Non PVC / Enlylronment friendly / Useful lifetime Slip resistance / Chemical resistance / Fire and Cigarette burns resistance / Electric Insulation Sound absorption / No coating required

SIZE | THICKNESS

60 cm x 60 cm x 3.5 mm (variation / ±0.15mm)











ST-101 ST-103 LINEN JUST WALNUT SADDLE BROWN

ST-104 COCOA POWDER









ST-105 NORDIC

ST-106 CHIC SHADOW

ST-107 NOTRE DAME

ST-108 BOWLER HAT



ST-109

DEEP FOSSIL







ST-110 URBAN STREET

ST-111 **BRETON BLUE**

ST-112 ONYXPEARL

Shades and colors may vary from color chart and actual tiles due to batch tolerances.



SM | NATURAL RUBBER FLOOR TILES

Unicolor Rubber Floor Tiles for round studded surface and has been formulated as a highly durable product. It performs well in all high traffic areas.

APPLICATIONS


Education, Shopping Center, Residence, Office, Healthcare, Fitness, Warehouse

FEATURES

Non PVC / Enivironment friendly / Useful lifetime Slip resistance / Chemical resistance / Fire and Cigarette burns resistance / Electric Insulation Sound absorption / No coating required

SIZE | THICKNESS

60 cm x 60 cm x 3.0 mm (variation / ±0.15mm)





Shades and colors may vary from color chart and actual tiles due to batch tolerances.









HM | NATURAL RUBBER FLOOR TILES

Natural Rubber Floor Tiles is finished with a hammered surface and has been formulated as a highly durable product. It performs well in all high traffic areas.

APPLICATIONS


Education, Shopping Center, Residence, Office, Healthcare, Fitness, Warehouse

FEATURES

Non PVC / Enlylronment friendly / Useful lifetime Slip resistance / Chemical resistance / Fire and Cigarette burns resistance / Electric Insulation Sound absorption / No coating required

SIZE | THICKNESS

60 cm x 60 cm x 3.0 mm (variation / ±0.15mm)









HM-302 ARCTIC



HM-304 MISSISSIPPI BERMUDA



HM-305 MALDIVES



HM-306 HM-307 CARIBBEAN



HM-308



HM-309 LONG ISLAND



HM-310 KOH SAMUI



BORA BORA RIVERA



Shades and colors may vary from color chart and actual tiles due to batch tolerances.



HG | NATURAL RUBBER FLOOR TILES

Multicolored Rubber Floor Tile with a hammered surface and has been formulated as a highly durable product. It performs well in all high traffic areas.

APPLICATIONS


Education, Shopping Center, Residence, Office, Healthcare, Fitness, Warehouse

FEATURES

Non PVC / Enlylronment friendly / Useful lifetime Slip resistance / Chemical resistance / Fire and Cigarette burns resistance / Electric Insulation Sound absorption / No coating required

SIZE | THICKNESS

60 cm x 60 cm x 3.0 mm (variation / ±0.15mm)





HG-501 MARSHMALLOW TREAT



HG-502 COCONUT CHIP



HG-503 GRAHAM CRACKER CHARCOAL SOFT



HG-504 SERVE



HG-505 TOFFEE BAR



HG-506 FRAPPUCCINO



HG-507 INDUSTRIAL CHOC



HG-508 MONSTER MASH



HG-509 RASPBERRY CRUNCH



HG-510 BIRTHDAY CAKE



HG-511 BLUE MOON



HG-512 SWEET MINT



HG-513 PUMPKIN CHEESE



HG-514 BLUE VELVET

Shades and colors may vary from color chart and actual tiles due to batch tolerances.





Fine Rubber Floor Tiles for flat, direction-oriented relief structure with marbling design surface and has been formulated as a highly durable product. It performs well in all high traffic areas.

APPLICATIONS


Education, Shopping Center, Residence, Office, Healthcare, Fitness, Warehouse

FEATURES

Non PVC / Enivironment friendly / Useful lifetime Slip resistance / Chemical resistance / Fire and Cigarette burns resistance / Electric insulation Sound absorption / No coating required

SIZE | THICKNESS

60 cm x 60 cm x 3.0 mm (variation / ±0.15mm)







NT-602

STORMY SKY



FLOOR

NT-603 EARTH



NT-601

RAIN DROP





NT-605 NOIR

Shades and colors may vary from color chart and actual tiles due to batch tolerances.







Rubber Roll

The Original

5 - 12mm Rubber Roll is suitable for cardio, resistance, functional, free weights and other multi purpose areas. The homogeneous construction of the flooring makes it resilient, durable and provides low step noise reduction.

- Suitable for high footfall and where products may be dropped.
- Suitable for cardio zones, dense material allows for easy kit maneuverability
- 100% recycled rubber.
- Available in many colours.

Rubber Roll Dot Matrix

FEATURES

- Shock absorption
- Impact resistance
- Sound absorption

MATERIAL COMPOSTION

- Recycle Rubber (85%)
- EPDM Granules (15%)
- bonded with PU polymer

SIZE

- 1.25m x 10m x 5.0 | 8.0 | 10mm
- (1 roll = 12.5 sq.m)

AREAS OF APPLICATIONS

• fitness


PVC EDGE

- thickness: 5.0mm
- o color : Black



ALUMINIUM EDGE


- length: 2.0 | 2.5mm
- thickness: 8.0 | 10.0mm
- color: matte silver



COLOR CODE







Pure Black

Dot Grey

Dot Blue





Blue Twist

Dot Red















Free Weight Areas



Premium Tiles

The premium tiles feature a heterogeneous construction, consisting of an impact absorbing bottom layer and a hard wearing closed face surface layer. This design gives them high levels of noise and vibration absorption making them ideal for free weights areas.

- Suitable for high footfall and free weights space
- Can be used as weightlifting platform drop zones
- 100% recycled rubber
- Lock System compatible
- Size: 50cm x 50xm | 50cm x 100cm | 100cm x 100cm
- Thickness: 15mm | 25mm | 40mm





COLOR CODE







Thickness: 15mm | 25mm | 40mm

EPDM Top Layer Thickness (if applicable): 3mm

Compatible with LOCK System : Yes

Size: 50cm x 50cm | 50cm x 100cm | 100cm x 100cm

Bevel: Yes | Available in Thickness 25mm

Approximate Density: 1.015g/cm3

Construction: Heterogeneous (dual layer)

Material: SBR Rubber Base with 3mm EPDM Top Sheet.

Safety Pass: EN 13501-1

Force Reduction: 46.7% (EN 14808)

Appearance: Smooth, dense closed face

Footfall Usage : High

Installation: Loose Laid with LOCK system or Bonded

Adhesive: Dunlop GP Low Smell Adhesive | HP7



Size = 50cm x 50cm 1 Sq.m. = 4 pcs.



Size = 50cm x 100cm 1 Sq.m. = 2 pcs.



Size = 100cm x 100cm 1 Sq.m. = 1 pcs.





NC | NATURAL RUBBER FLOOR TILES

Multicolored Rubber Floor Tile with a hammered surface and has been formulated as a highly durable product. It performs well in all high traffic areas.


APPLICATION

Education, Shopping Center, Residence,
Office, Healthcare, Fitness, Warehouse

FEATURES

Non PVC / Enivironment friendly / Useful lifetime Silp resistance / Chemical resistance / Fire and Cigarette burns resistance / Electric insulation Sound absorption / No coating required

SIZE | THICKNESS






COLOR CODES



NC-701 LIGHT GREY



NC-702 DARK GREY



NC-704 BLACK



NC-709 BROWN



NTC-602 DARK GREY



BLACK

NTC605

Shades and colors may vary from color chart and actual tiles due to batch tolerances.

Treadmill mat

Floorament treadmill mat can be supplied in different sizes and thickness to fit you applications for spinning, treadmill, cross trainer and so on, giving good protection for you floors and allowing for differences in floor and equipment balance levels.

Features & Benefits

- Sound & shock absorbent
- Anti-fatigue
- Protection for floor and machine

Specifications

- Material: PU binder, Recycle rubber & Synthetic EPDM
- Color: Black
- ThicknessL: 4mm.
- Size: 2.2m*1m, or customized sizes



The Roll Out Ladder

The Roll Out Ladder is perfect for indoor speed and agility training. Made of heavy-duty, durable recycled rubber, it easily unrolls and lies flat, then rolls up for convenient transportation and storage.

Features & Benefits

- Durable
- Anti-slip
- · Quickly unrolls and lies flat
- Portable

Specifications

- Material: PU binder, Recycle rubber
 & Synthetic EPDM
- Color: Mixed color
- ThicknessL: 3mm or customized
- Size: 4540m*410mm









Performance Roll Soft Sport

Performance Roll Soft Sport is a heterogeneous flooring solution that consists of 3mm, 4.5mm, 6mm, 8mm and 10mm premium flooring roll as the feel good top layer and High Shock Absorption Underlay as the base layer.



Available in: Roll

Thickness: 3mm | 4.5mm | 6mm | 8mm

Size: 1.80cm x 20m

Construction: Heterogeneous (dual layer)

Pvc wear resistance


Material: High density foaming base with PVC wear resistance Top sheet

Shock Absorption Rate: >55%
Environmental: FloorScore

Function: Soundproof Footfall Usage: High

Installation: Loose Laid or Bonded

Adhesive : Acrylic



Texture Layer
Stabilization Layer
Backing





PVC Roll Soft Sport

MATERIAL COMPOSTION

high quality of pure virgin materials 100% "Pure Virgin Polyvinyl Chloride"

SIZE

1.8m x 20m x 4.5mm (1 roll = 36 sq.m.)

PVC EDGE

thickness: 3.0mm color: black | grey | brown

COLOR









BG-6819



HJ-6822





Eco Rubber Tile

The Eco rubber tile is a simple and effective solution for flooring your fitness areas. Floorament offer this product in 10mm, 25mm option, each is suitable for a variety of applications. These are constructed of a high quality SBR rubber which offers an affordable solution to cover large spaces.

- Suitable for high footfallareas and where products may be dropped.
- Available in 10mm
- Size: 50cm x 50cm | 100cm x 100cm



Eco Rubber Tiles

Thickness: 10mm | 25mm

EPDM Top Layer Thickness (if applicable): NO

Compatible with LOCK System: NO

Size: 50cm x 50cm | 50cm x 100cm | 100cm x 100cm

Bevel: Yes | Available in Thickness 25mm

Approximate Density: 1000kg/m3 - 1050kg/m3

Construction: Single Layer

Material: SBR Rubber mix with natural rubber crumb

Safety Pass: EN71-3

Appearance: Open Faced

Footfall Usage: Medium to low

Installation: Loose Laid or Bonded

Adhesive: Dunlop GP Low Smell Adhesive | HP7

Eco Tiles

FEATURES

Shock absorption Impact resistance Sound absorption usable indoor and outdoor

MATERIAL COMPOSTION

Synthetic Rubber Block Granules (100%) bonded with PU polymer

SIZE

1m x 1m x 10 mm 50cm x 50cm x 25mm





RUBBER EDGE

16.5cm x 50cm x 25mm

















Sprint Tracks and Sport court

Raw materials are all-natural rubber, epdm and polymer eco-friendly materials.

- Athletes'speed and sports performance and reduces the rate of fall injuries.
- · Various colors.
- High degree elasticity.
- · Anti UV ability and anti-aging.
- Best outdoor sports ground material



Indoor Sport Court

MATERIAL COMPOSTION

high quality of pure virgin materials 100% "Pure Virgin Polyvinyl Chloride"

SIZE

1.8m x 20m x 4.5mm (1 roll = 36 sq.m.)

PVC EDGE

thickness: 3.0mm color: black | grey | brown

COLOR



BG-8501

BG-8301



















BG-8303

BG-8502





BG-8201







EPDM Pour in Place

Thickness: 10mm - 30mm

EPDM Top Layer Thickness (if applicable): YES

Density: EN1183-1

Hardness: EN5505:2000

Construction: Single Layer or Dual Layer

Material: Epdm granule mix with natural rubber crumb

Safety Pass: EN71-3

Footfall Usage: High to Medium



Running Track

EPDM Color available

Available in 23 colors / color can be mixed




EPDM Sport Roll

Designed for indoor & Outdoor recreational surfaces, series provides high traction and comfort underfoot.

Facilities that have intensive ball sports, running & training would benefit from series.

Laminated from a base layer cushion series with a dense layer of compressed EPDM Rubber, series can qualify the facility with easy installation and economic value.

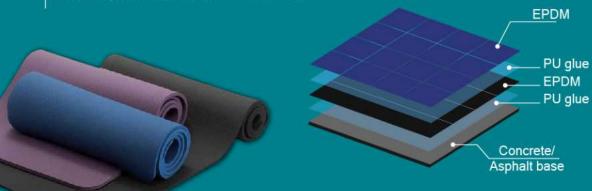

Applications

- Indoor and outdoor sports courts
- Running track
- Kindergarten
- Playground

Features & Benefits

- Multi-functional applications
- Wear resistant
- Anti-slip
- Comfort underfoot

Specifications

- Material: PU binder & Synthetic EPDM
- Color: Variety of colors
- Thickness: 3~10mm
- Roll Length: 10/15/20m
- Roll Width: 1m







Functional Zones

Available in

Rubber Roll printed patterns

Size : $1.25m \times 10m \times 5.0 \mid 8.0 \mid 10mm$ (1 roll = 12.5 sq.m.)





Functional Zones Available in

Premium Tiles printed patterns

Size: 1m x 1m x 15 | 25mm

50cm x 50cm x 25m

Interlocking Tiles

Interlocking tiles are the perfect floor solution that is easy to install, tough and resilient enough for multiple applications.

They are made of recycled tire rubber and EPDM rubber.





full layer of SBR and EPDM Rubber size: 60cm x 60cm / 100 cm x 100cm Thickness: 10 mm

Applications

- Gyms
- Schools
- Offices
- Retail stores
- Kindergarten
- Clubs
- Recreation centers

Features & Benefits

- Loose laid
- Wear resisant
- Slip resistant
- Shock absorbent
- Envirnmentally safetety

Specifications

- Material: PU binder, Recycle tire rubber & SyntheticEPDM
- Color:Variety of colors



Laminated Interlocking

Made with a two-piece construction (a durable recycled rubber top with a foam backing for anti-fatigue purposes), Laminate Interlocking definitely enhances shock absorption and offers much better underfoot comfort.

The puzzle-cut system allows for flexibility and cost savings when tiles need to be replaced due to wear.





Applications

- Gyms
- Offices
- Retail stores
- Kindergarten

- Workplace
- Exhibitions
- Check-out stands

Features & Benefits


- Loose laid
- Wear resisant
- Slip resistant
- Shock absorbent
- Sound absorbent

- Anti-fatique
- Comfortable underfoot
- Check-out stands
- Eco friendly


Specifications

- Material: PU binder, Recycle rubber & Synthetic EPDM, Foam rubber
- Color:Variety of colors



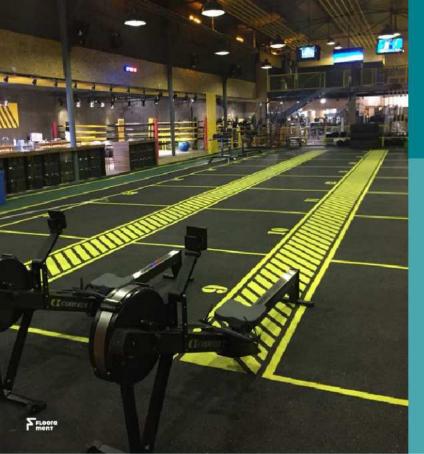

Graphics & Flooring customization



We offer custom branding on most of our flooring range.

Customization can add help complete a flooring installation and add branding in to your potential space.

Floorament can apply shapes, slogans, logos or designs on your floors. Our team regularly work with Gym Equipment Team and trainers to design specific grid systems and layouts that align to your facilities group programing.

• Available is UV printed, Rubber paint & Craft in-laid



FR-1500 series





(random mixed)











FR-2000 series





















































Endless color combinations

Our rubber flooring is a combination of design and high walking comfort to meet the challenges of commercial and athletic environments, With various color to choose from, you can design your own fitness floor, sport floor and set youself apart from the copetition. For further assistance, please contact our sales team.

Minimum Order 500 sq.m. / per design สีพิเศษสั่งทำ สำหรับขั้นต่ำ 500 ตร.ม. / สีเท่านั้น

FR-3000 series

















FR-2032



FR-2033

















FR-5000 series























FR-7000 series



























































Minimum Order 500 sq.m. / per design สีพิเศษสั่งทำ สำหรับขั้นต่ำ 500 ตร.ม. / สีเท่านั้น

Available Test Certificates

(For gym and sports flooring)

Please contact us for further information.

Physical Performance Testing		Chemical Performance Testing		Flamability Properties Testing	
Test	Test Method	Test	Test Method	Test	Test Method
Tensile strength Tear strength	ASTM D412-06a(2013) Method A ASTM D624-00(2012) ASTM D2240-05(2010) ASTM D412-06a(2013) Method A ASTM D624-00(2012) ASTM D395-03(2006) Method B ASTM D2047-11 ASTM D5963-04(2010) Method A	SVHC	SGS-In-House method GZTC CHM-TOP-092-01 GZTC CHM-TOP-092-02	NF P 92-507:200 Fire safty-building-interior fitting materials	NF P 92-501:1995
Shore hrdness Tesile stregth Tear strength Compression set Static coefficient of frication Relative volume loss		RoHS Directive 2011/65/EU	IEC 62321: 2008, ICP-OES IEC 62321: 2008, UV-Vis IEC 62321: 2008, GC-MS	EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements	EN ISO 11925-2:2010 Reaction to fire test
		PAHs	ZEK 01.4-08 of German ZLS		
		PAHs	ZEK 01.4-08 of German ZLS	16 CFR 1630 Standard for the surface flammability of Carpets and Rugs (FF1-70)	
		PAHs	ZEK 01.4-08 of German ZLS		
		Elementary Analysis	US EPA Method 3052:1996		
		Safety Data Sheet (SDS)	1907/2006/EC, 1272/2008/EC		
		VOCs	ISO 16000-9:2006 (ASTM D5116-97)		
		VOCs	ISO 16000-9:2006 (ASTM D5116-97)		
		Determination of Benzene, Toluene, Xylene content	With reference of SGS in-house method Weight 2.0g sample to headspace bottle, then heat 1hr at 100°C in headspace intrument		SGS Success By Association

Tinma Plastic Industry Co., Ltd. 279/30 Soi Sathupradit 19, Chongnonsi, Yannawa, Bangkok 10120 Thailand **L** +662 295 1589 ✓ info.floorament@gmail.com www.floorament.com